



PSB-2000 Series

Multi-Range D.C. Power Supply

FEATURES

- Output Voltage Rating : 80V/800V
- Output Power Rating : 400W ~ 800W
- Constant Power Output for Multi-Range (V & I) Operation
- Series and Parallel Operation (2 Units in Series or 4 Units in Parallel Maximum)
- 90 Degree Angle Rotatable Control Panel
- Sequence Function Edited by PC Will be Controlled Through Power Supply Optional Interface
- Standard Interface : RS-232C/USB/Analog Control Interface
- Optional Interface : GPIB

GW INSTEK
Simply Reliable

Fulfill Multi-Range and High-Voltage Output Simulation Needs


The PSB-2000 Series is a high power density, programmable and multi-range output DC power supply. There are six models in the series including one power booster unit. The PSB-2000 Series has the output voltage of 0~80V and 0~800V, and the output power ranges of 0~400W and 0~800W. The multi-range output functionality facilitates flexible collocations of higher voltage and larger current under the rated power range. Both series and parallel connections can be applied to the PSB-2000 Series to fulfill the requirements of higher power output range.

The PSB-2000 Series provides three sets of preset function keys to memorize regularly used settings of voltage, current and power that users can recall rapidly. The sequence function, via RS232C, USB interface or optional GPIB interface, can connect with the computer to produce output power defined by sequence of a series of set voltage and current steps that are defined by the computer. This function is often used to establish a standard test procedure for the verification of the influence on DUTs done by the swiftly changing operating conditions.

The PSB-2000 Series protects over voltage and over current. The power supply output function will be shut down to protect DUTs while the protection mechanism is triggered to function. When conducting battery charging operation, the Hi- Ω mode of the PSB-2000 Series will prevent reverse current from damaging power supply.


The PSB-2000 Series provides analog control interfaces on the rear panel to control PSB-2000 Series output via the external voltage or to externally monitor voltage and current output status of power supply. The PSB-2000 Series panel can be rotated 90 degree angle suitable for vertical or horizontal position to accommodate the ideal space utilization.

A. MULTI-RANGE OUTPUT OPERATION



The operation area of a Conventional Power Supply

Compared with the maximum power output of the conventional power supply that is calculated by the maximum output voltage multiplies by the maximum output current, the PSB-2000 series, defying the formula, has a unique characteristic of multi-range output (voltage and current). This distinguishing feature, under the same maximum power output range, can output a higher voltage with a smaller current and vice versa. For instance, for a conventional power supply with a maximum power output of 360W, the maximum voltage and current outputs are likely to be



The operation area of a Multi-Range Power Supply for PSB-2000 Series

10V and 36A respectively. Comparatively, PSB-2400L, with the maximum power output of 400W, provides voltage and current output ranges of 0~80V and 0~40A. The maximum current of 5A will be provided when the voltage reaches 80V and the maximum voltage of 10V for the maximum current of 40A. PSB-2400L, breaking the limitation of $P_{max}=V_{max} \times I_{max}$, broadens voltage and current application ranges. The following diagrams illustrate the voltage and current comparison between the multi-range output power supply and the conventional power supply.

B. PRODUCTS IN THE SERIES

There are six models in the PSB-2000 Series. Model type, output voltage, output current and output power are as follows :


MODEL	PSB-2400L	PSB-2800L	PSB-2400L2	PSB-2400H	PSB-2800H	PSB-2800LS*
Channel Number	1	1	2	1	1	NA
Voltage Rating**	0 ~ 80V	0 ~ 80V	0 ~ 80V x 2CH	0 ~ 800V	0 ~ 800V	80V
Current Rating***	0 ~ 40A	0 ~ 80A	0 ~ 40A x 2CH	0 ~ 3A	0 ~ 6A	80A
Output Power (Max.)	400W	800W	800W	400W	800W	800W

* PSB-2800LS, a booster unit acting as slave to extend current, can not operate alone. It must operate with PSB-2800L master.


** The maximum current under the highest output voltage is power/voltage. For instance, when PSB-2400L outputs 80V the maximum current is $400W/80V = 5A$.

*** Same as above. When PSB-2400L outputs 40A the highest voltage is $400W/40A = 10V$.

C. SERIES AND PARALLEL CONNECTIONS

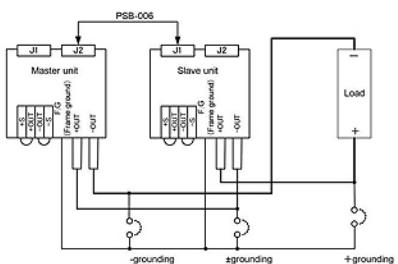


Series Connection

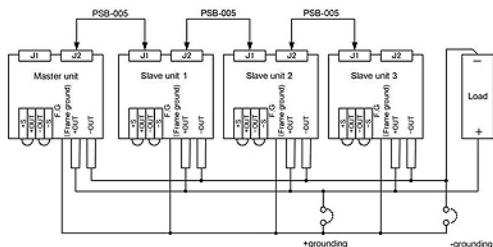

Parallel Connection

D. PRESET FUNCTION



The PSB-2000 Series provides three sets of parameter preset function keys on the front panel and each parameter preset memory includes output voltage, output current and output power. Users can speedily recall frequently used settings through operating the front panel preset keys to store everyday settings.


Hence, the PSB-2000 Series, with its multi-range output function and the power extension capability of series and parallel connections, is the high power density and high performance to cost ratio DC power supply, which provides a wider range of power applications for any limited equipment space. The PSB-2000 Series is an ideal selection for testing DC power supply module, automobile lithium and lithium iron battery and electronic parts.

E. OVP AND OCP FUNCTIONS

Model Number	OVP Setting Range	Model Number	OVP Setting Range
PSB-2400L	1.0V to 84.0V	PSB-2400L	1.0A to 42.0A
PSB-2800L		PSB-2400L2	1.0A to 84.0A
PSB-2400L2		PSB-2800L	1.0A to 84.0A
PSB-2800LS		PSB-2400H	0.1A to 3.15A
PSB-2400H		PSB-2800H	0.1A to 6.30A

When the voltage and current outputs exceed the preset conditions, the PSB-2000 Series will shut down the output function to prevent DUTs from damaging. The OVP and OCP protection level can be set to 10%~110% of the rated voltage or current and the preset condition is 110% of the rated voltage and current.

F. SEQUENCE FUNCTION

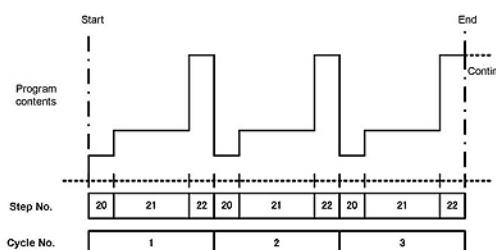


Example for the sequence operation

When applying sequence function, the computer must first edit a series of steps defined by different voltage, current and duration, which, in CSV format, will be sent to PSB-2000 memory via RS-232C, USB interface or GPIB interface (optional) to periodically produce a series of steps defined by different voltage, current and

duration. The minimum time for each sequence is set to one second and the maximum number of step is 100. This function is to test the impact of DUTs done by the rapidly changing power supply. The reliability test of electronics products toward changing power supply is one of the very important verification items.

G. TRACKING FUNCTION


H. 90 DEGREE ANGLE ROTATABLE CONTROL PANEL

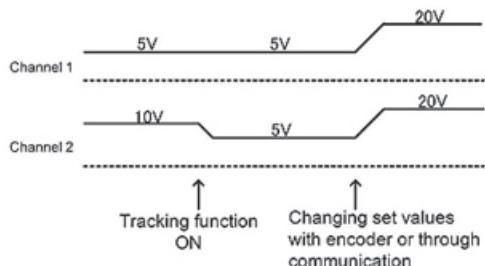

The tracking function is available on the dual output model (PSB-2400L2) only. It allows the setting of both channels to be changed at the same time. When the value of the one channel is changed, and the other channel will automatically change its value accordingly if the tracking function is active (ON).


Taking working space utilization into consideration, PSB-2000 can be placed vertically or horizontally by its unique design of 90 degree angle rotatable control panel for users' ease-of-use.

I. DELAY FUNCTION

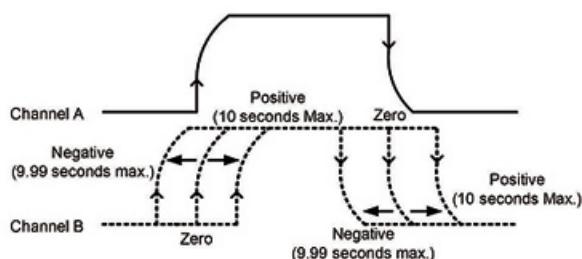


The delay function is available on the dual channel model (PSB-2400L2) only. It adds a rise and fall delay time to the output of channel 2 for a specified amount of time (in seconds) from a reference point (output of channel 1). The rise delay time refers to the delay time for turning the output on. The fall delay time refers to the delay time for turning the output off.

J. EXTERNAL CONTROL AND ANALOG MONITORING FUNCTION

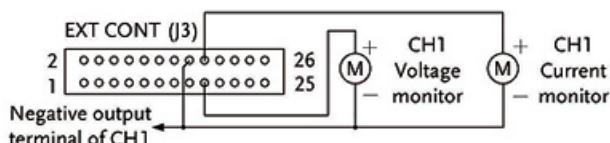

External Voltage Monitor of the Output

The rear panel of the PSB-2000 Series provides 26-Pin analog control connector and users can control output voltage and current value via external voltage or resistance. Furthermore, power supply's output on and off or AC input shut down can also be executed through the external control connector. The designated pin of the port can be measured to monitor output voltage and current. The following diagrams illustrate several typical external control application connections. Please refer to product user manual for more or detailed connection methods.

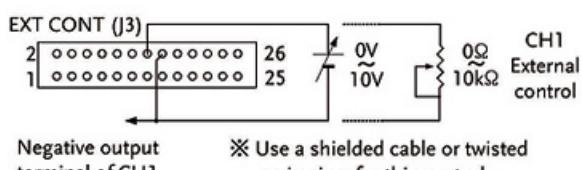

External Voltage Control of the output

PANEL INTRODUCTION

PSB-2400L2

PSB-2400L/PSB-2800L

PSB-2400H/PSB-2800H

PSB-2800LS

CE USB RS-232 GPIB Analog Control Local Bus

Note : PSB-2400H/PSB-2800H are not CE approved

1. Front grill

2. Setting Display & Operation Keys

3. Output Terminals (Front Panel)

4. Output Terminal (Rear Panel)

5. Signal Input & Output Connector

6. External Control Connector (Analog Control Connector)

7. AC Input

8. Interface Card (Local Bus / RS-232 / USB)

SPECIFICATIONS		PSB-2400L	PSB-2800L	PSB-2400L2	PSB-2400H	PSB-2800H	PSB-2800LS		
OUTPUT RATING									
Voltage	0 ~ 80V	0 ~ 80V	0 ~ 80V x 2CH	0 ~ 800V	0 ~ 800V	0 ~ 800V	80V		
Current	0 ~ 40A	0 ~ 80A	0 ~ 40A x 2CH	0 ~ 3A	0 ~ 6A	0 ~ 6A	80A		
Power	400W	800W	800W	400W	800W	800W	800W		
REGULATION (CV)									
Load Line	0.01% ± 3mV of rated voltage 0.01% ± 2mV of rated voltage		0.01% ± 30mV of rated voltage 0.01% ± 20mV of rated voltage		N/A				
REGULATION (CC)									
Load Line	0.02% ± 3mA of rated current 0.01% ± 2mA of rated current		0.05% ± 15mA of rated current 0.05% ± 10mA of rated current		N/A				
RIPPLE & NOISE (Noise Bandwidth 20MHz ; Ripple Bandwidth=1MHz)									
CV p-p	90mV	150mV	90mV	250mV(only output voltage measures more than 1% of the rated voltage)	300mV(only output voltage measures more than 1% of the rated voltage)	N/A			
CV rms	4mV	6mV	4mV	20mV(when current measures<2A) 35mV(when current measures>2A)	25mV(when current measures<2A) 40mV(when current measures>2A)				
CC rms	30mA	60mA	30mA	15mA	20mA				
PROGRAMMING ACCURACY									
Voltage	0.1% setting±2digits		0.1% setting±2digits		N/A				
Current	0.2%setting±2digits		0.2% setting±2digits						
Power	± 10W		± 10W (only output voltage measures more than 1% of rated voltage)						
READ BACK ACCURACY									
Voltage	0.2% reading±2digits		0.2% reading±2digits		N/A				
Current	0.3% reading±2digits		0.3% reading±2digits						
Power	0.5% reading±5digits		0.5% reading±Vout x 40mA						
RESPONSE TIME									
Raise Time(Full load/No load)	50ms			200ms		N/A			
Fall Time(Full load)	100ms			500ms					
Fall Time(No load)	500ms			1000ms					
Load Transient Recover Time (Load change from 50~100%)	1ms			7ms					
PROGRAMMING RESOLUTION									
Voltage	10mV			100mV		N/A			
Current	10mA			10mA					
Power	10W			10W					
MEASUREMENT RESOLUTION									
Voltage	10mV			100mV		N/A			
Current	10mA			10mA					
Power	10W			10W					
SERIES AND PARALLEL CAPABILITY									
Channel Number	1		1	2	1	1			
Series Operation	Up to 2 Units	Up to 2 Units	N/A	N/A	N/A	Up to 2 Units	For PSB-2800L Only		
Parallel Operation	Up to 4 Units	Up to 4 Units	N/A	Up to 2 Units	N/A	N/A			
Parallel with booster PSB-2800LS	N/A	Up to 3 Units	N/A	N/A	N/A	N/A			
PROTECTION FUNCTION									
OVP (Fixed)	Output off when 110% of rated voltage			Output off when output voltage exceeds 110% of rated voltage			N/A		
OVP (Variable)	Output off when operating; Setting range:1V~84V with front panel			Presettable in range from 10V ~ 840V om front panel					
OCP (Fixed)	Output off when 110% of rated current			Output off when output voltage exceed 110% of rated current					
OCP (Variable)	Output off when operating;Setting range:1A~42A(84A for model number)			Presettable in range from 0.1A ~ 6.30A om front panel					
OHP	Output off above heat sink setting temperature			Output off at the internal heat sink temperature over setting value					
ENVIRONMENT CONDITION									
Operation Temp	0°C ~ 40°C					N/A			
Storage Temp	-20°C ~ 70°C								
Operating Humidity	30% ~ 80% RH (no dew condensation)								
Storage Humidity	30% ~ 80% RH (no dew condensation)								
OTHER									
Inrush Current	35A Max	70A Max	70A Mmax	35A Max	70A Max	70A Max			
Power Consumption/Factor	560VA/0.99	1120VA/0.99	1120VA/0.99	560VA/0.99	1120VA/0.99	1120VA/0.99			
Cooling Method	Forced air-cooling with fan motor								
Power Source	100VAC ~ 240VAC, 50/60Hz, Single phase								
Interface (Standard)	RS-232C/USB								
Interface (Optional)	GPIB								
Analog Control	Yes								
DIMENSIONS & WEIGHT									
	210(W) x 124(H) x 290(D)mm								
	Approx.5kg	Approx.7kg	Approx.7kg	Approx. 5kg	Approx. 6kg	Approx. 7kg			

Specifications subject to change without notice. SB-2000GD1BH

ORDERING INFORMATION		OPTIONAL ACCESSORIES					
PSB-2400L 0~80V/0~40A/400W Multi-Range DC Power Supply		PSB-001 GPIB Card					
PSB-2800L 0~80V/0~80A/800W Multi-Range DC Power Supply		PSB-003 Parallel Connection Kit for Horizontal Installation. Kit Includes: (PSB-007 Joint Kit, Horizontal bus bar x 2 , PSB-005 x1)					
PSB-2400L2 0~80V x 2/0~40A x 2/800W Multi-Range DC Power Supply		PSB-004 Parallel Connection Kit for Vertical Installation. Kit Includes: (PSB-007 Joint Kit, Verical bus bar x 2 , PSB-005 x 1)					
PSB-2400H 0~800V/0~3A/400W Multi-Range DC Power Supply		PSB-005 Parallel Connection Signal Cable					
PSB-2800H 0~800V/0~6A/800W Multi-Range DC Power Supply		PSB-006 Serial Connection Signal Cable					
PSB-2800LS 800W Slave (Booster) Unit For Current Extension Only		PSB-007 Joint Kit: Includes 4 Joining Plates, (M3x6)screws x 4;(M3x8)screw x 2					
ACCESSORIES :		GRJ-1101 Modular Cables					
User Manual (CD) x 1, AC Power Cord x 1, External Control Connector (26pin), Screws for output terminals on rear panel, Protection covers for output terminals on rear panel, Protection caps for output terminals on the front panel, GND Cable, USB Cable (For Model Number : PSB-2400L; PSB-2800L;PSB-2400L2; PSB-2400H; PSB-2800H); Locatal Bus (For Model Number : PSB-2400L; PSB-2800L;PSB-2400L2; PSB-2400H; PSB-2800H)		GTL-248 GPIB Cable					
		GTL-251 GPIB USB Cable(high speed)					

Global Headquarters
GOOD WILL INSTRUMENT CO., LTD.
T +886-2-2268-0389 F +886-2-2268-0639

China Subsidiary
GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary
GOOD WILL INSTRUMENT (M) SDN. BHD.
T +604-6309988 F +604-6309989

U.S.A. Subsidiary
INSTEK AMERICA CORP.
T +1-909-5918358 F +1-909-5912280

Japan Subsidiary
INSTEK JAPAN CORPORATION
T +81-45-476-5650 F +81-45-476-5653

Korea Subsidiary
GOOD WILL INSTRUMENT KOREA CO., LTD.
T +82-2-3439-2205 F +82-2-3439-2207

GW INSTEK
Simply Reliable
www.gwinstek.com