

TECHNICAL DATA

Fluke TL1500DC Insulated Test Leads





Key features

- Measures voltage safely and accurately up to 1500 V DC
- CAT III 1500 V CAT IV 600 V with protective cap / CAT II 1500 V without protective cap, 10A
- Compatible with most Fluke clamp meters and multimeters
- Comes with one-year warranty
- 39.3 inches (1 meter) long

Product overview: Fluke TL1500DC Insulated Test Leads

The Fluke TL1500DC test leads provide safe and accurate voltage measurements up to 1500 V DC, commonly found in solar, wind, and battery applications. These insulated test leads made of PVC material are safety rated CAT III 1500 V, CAT IV 600 V with the protective cap and CAT II 1500 V without protective cap for use in different environments.

Specifications: Fluke TL1500DC Insulated Test Leads


Ratings:	IEC 61010-031 CAT II 1500 V, CAT III 1500 V, CAT IV 600 V, 10 A
Compatibility:	Compatible with all instruments that accept standard 4 mm shrouded banana plugs
Pollution:	Pollution Degree 2, 2000 m altitude
Environmental ratings:	Operating -10C to 50C



Storage: -20 °C to 60 °C @ < 80 % RH



Ordering information

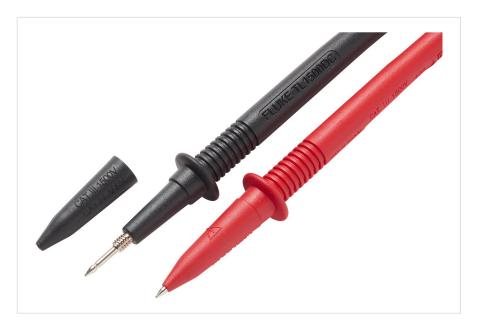

Fluke TL1500DC

Fluke TL1500DC Insulated Test Leads

Includes:

- One pair (red, black) TL1500DC Insulated Test Leads
- Two protective caps
- One-year warranty



$\textbf{Fluke}. \ \textit{Keeping your world up and running}. \\ \textbf{\textcircled{\$}}$

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

For more information call: In the U.S.A. (800) 443-5853 In Canada (800) 36-FLUKE From other countries +1 (425) 446-5500 www.fluke.com ©2022 Fluke Corporation. Specifications subject to change without notice. 11/2022

Modification of this document is not permitted without written permission from Fluke Corporation.