



Motorised horizontal test stand SAUTER THM-N, THM-S

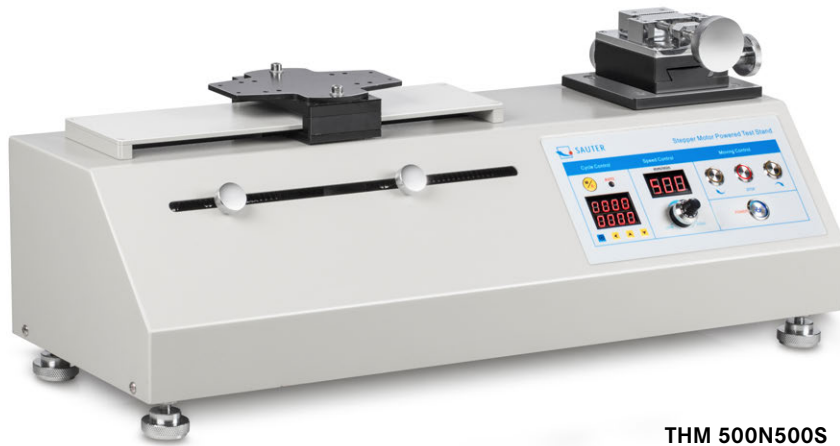

THM 500N500S

Motorised test stand with digital display for horizontal force measurement where highest standards are required

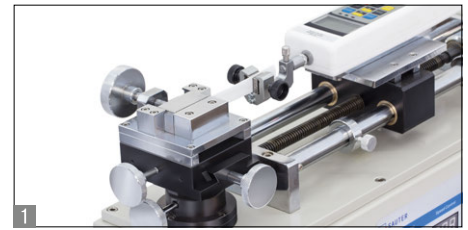

Features

- **New: Step motor for greatest ease of use only at THM 500N500S**
  - for constant speed from the smallest to the maximum load
  - allows testing at minimum speed and full load
  - for higher positioning accuracy. Precise starting and stopping, without follow-up movement, even at high speeds
  - precise adjustment of the process speed using the information shown on the display
- **Easy to use**
- Efficient working
- Robust design and heavy duty metal construction
- **Linear adjustable jaw vice**  
The clamping vice can be locked and finely adjusted sideways and up/down using the setting wheel (THM 500N500N)
- **Repeat function** for fatigue tests
- Digital speed display to read the process speed straightaway
- **Premium operating panel:**
  - Digital speed display
  - Digital repeat function display
  - Control of the test stand using PC software SAUTER AFH

- **2** Figure shows the premium operating panel of SAUTER THM 500N500N
- **Solid and versatile fixing options** of SAUTER force measuring devices, see accessory page 30 et seq.
- Suitable for all SAUTER force measuring devices up to 500 N (not supplied with the product)

Technical data

**3** THM-N:

- Minimum distance between left and right object fastening: 30 mm
- Maximum travel length: 220 mm (protected by electronic end switches)
- Overall dimensions W×D×H 170×345×550 mm
- Net weight approx. 35 kg

**THM-S:**

- Maximum travel length: 240 mm (protected by electronic end switches)
- Overall dimensions W×D×H 695×235×300 mm
- Net weight approx. 48 kg





















Accessories

- **Digital length measuring device**, measuring range 200 mm, readout 0,01 mm, details see page 38, SAUTER LB 200-2.
- **Mounting the length measuring device LB** onto a SAUTER test stand at the factory, SAUTER LB-A02
- **Linear potentiometer for length measurement**, measuring range: 300 mm, readout: 0.01 mm, for details see page 39, SAUTER LD
- **Mounting the length measuring device** onto a SAUTER test stand at the factory, SAUTER LD-A06
- Only THM-S: **Force-displacement data transfer software** with graphical representation of the measuring process, only in combination with SAUTER LD, SAUTER AFH LD
- **Force-time data transfer software** for graphical representation on the PC and data transfer to Microsoft Excel®, SAUTER AFH FAST
- **Force-displacement data transfer software** with graphic display of the measurement process, only in combination with SAUTER LB, SAUTER AFH FD
- Only THM-N: **Data transfer software for repeat tests**, only in combination with SAUTER LB, SAUTER AFH FGT

STANDARD			OPTION	
THM	THM-S			

Model	Measuring range	Speed range	Motor
	[Max] N	mm/min	
SAUTER THM 500N500N	500	50-500	Electric motor
SAUTER THM 500N500S	500	1-500	Step motor

## Pictograms

 <b>Adjusting program (CAL):</b> For quick setting of the instrument's accuracy. External adjusting weight required.	 <b>Control outputs (optocoupler, digital I/O):</b> to connect relays, signal lamps, valves, etc.	 <b>Battery operation:</b> Ready for battery operation. The battery type is specified for each device.
 <b>Calibration block:</b> standard for adjusting or correcting the measuring device.	 <b>Analogue interface:</b> to connect a suitable peripheral device for analogue processing of the measurements	 <b>Rechargeable battery pack:</b> rechargeable set.
 <b>Peak hold function:</b> capturing a peak value within a measuring process.	 <b>Statistics:</b> using the saved values, the device calculates statistical data, such as average value, standard deviation etc.	 <b>Mains adapter:</b> 230V/50Hz in standard version for EU. On request GB, AUS or USA version available.
 <b>Scan mode:</b> continuous capture and display of measurements.	 <b>PC Software:</b> to transfer the measurement data from the device to a PC.	 <b>Power supply:</b> Integrated, 230V/50Hz in EU. More standards e.g. GB, AUS or USA on request.
 <b>Push and Pull:</b> the measuring device can capture tension and compression forces.	 <b>Printer:</b> a printer can be connected to the device to print out the measurement data.	 <b>Motorised drive:</b> The mechanical movement is carried out by a electric motor.
 <b>Length measurement:</b> captures the geometric dimensions of a test object or the movement during a test process.	 <b>GLP/ISO record keeping:</b> of measurement data with date, time and serial number. Only with SAUTER printers	 <b>Motorised drive:</b> The mechanical movement is carried out by a synchronous motor (stepper).
 <b>Focus function:</b> increases the measuring accuracy of a device within a defined measuring range.	 <b>Measuring units:</b> Weighing units can be switched to e.g. non-metric at the touch of a key. Please refer to website for more details.	 <b>Fast-Move:</b> the total length of travel can be covered by a single lever movement.
 <b>Internal memory:</b> to save measurements in the device memory.	 <b>Measuring with tolerance range (limit-setting function):</b> Upper and lower limiting can be programmed individually. The process is supported by an audible or visual signal, see the relevant model	 <b>DAkkS calibration possible:</b> The time required for DAkkS calibration is shown in days in the pictogram.
 <b>Data interface RS-232:</b> bidirectional, for connection of printer and PC.	 <b>Measuring units:</b> Weighing units can be switched to e.g. non-metric at the touch of a key. Please refer to website for more details.	 <b>Factory calibration:</b> The time required for factory calibration is specified in the pictogram.
 <b>Data interface USB:</b> To connect the measuring instrument to a printer, PC or other peripheral devices.	 <b>Measuring units:</b> Weighing units can be switched to e.g. non-metric at the touch of a key. Please refer to website for more details.	 <b>Package shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram.
 <b>Data interface Infrared:</b> To transfer data from the measuring instrument to a printer, PC or other peripheral devices.	 <b>ZERO:</b> Resets the display to "0".	 <b>Pallet shipment:</b> The time required for internal shipping preparations is shown in days in the pictogram.

Your KERN specialist dealer: